

SYRDL5

Mini Proximity / Mifare Reader

Feature

- 3 LED status indicators.
- Built-in Anti-Tamper protection.
- Built-in Buzzer.
- Communication : Wiegand / RS485.
- Built-in Watchdog to prevent system from halting.



Specification

Specs / Item	SYRDL5	SYRDL5-M1
Transmit Frequency	125KHz(EM)	13.56MHz(Mifare)
Read Range	5~10cm	1~3cm
Baud Rate	19,200 bps (4,800~115,200 bps)	
Card Compatibility	EM	Mifare
Card Read Time	0.1 sec	
Keypad	N/A	
LED Indicator	3 LED	
Communication	RS485 · Wiegand	
ID	1~8 (SYW95A) / 01~99 (SYSOFT-95A)	
Anti-Tamper Facility	Built-in	
Beep Tone	Built-in Buzzer	
Operating Temperature	-20°C ~ +70°C	
Input Voltage	8V~15V DC / 0.5~2W	
Dimensions (W x H x D)	44 x 88 x 20 mm	




Ordering Information

Item	Type
■ SYRDL5	Mini Proximity Reader -EM, ID card
■ SYRDL5-M1	Mini Proximity Reader -Mifare, IC card

❖ This specification is preliminary and subject to change without prior notice.

SYRIS Reader Serial -Access Control System Diagram

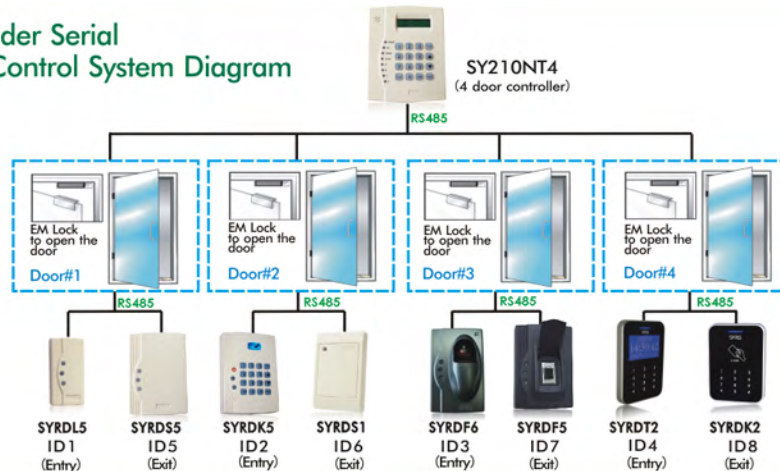

Copyright © 2012 SYRIS Technology Corp.

SYRIS ACCESS Reader
 SYRIS Security System